

ANT-5GCombo7

GNSS + 5G MIMO + WIFI MIMO Antenna



Outstanding Features

- **COMBO 7-in-1 ANTENNA:** 4x 5G LTE MIMO, 2x Wi-Fi and 1x GNSS Antenna; Screw mount; Cable length 3 meters (10ft).
- **IP67 WATERPROOF:** Outdoor Roof Type, water and dust-resistant for ultimate outdoor reliability.
- **GLOBAL 5G LTE RANGE:** Supports 4x4 MIMO; Works in most countries in the world with frequency range: 617~960MHz/ 1710~2690MHz/ 2900~3800MHz; 4x SMA Male Connector.
- **DUAL BAND Wi-Fi:** Supports 2x2 MIMO; Frequency range: 2400~2483.5MHz/ 4900~5925MHz; 2x RP-SMA Male Connector.
- **GNSS ANTENNA:** Frequency range: 1561.098~1575.42MHz; 1x SMA Male Connector.
- **COMPATIBLE ROUTERS:** Work with most 5G LTE cellular routers in the market with 2/3/4/5/6/7 antenna interfaces, like Teltonika RUTM50, RUTC50, RUTX50, TRB500. (Equivalent to Teltonika PR1KC640).

Specification

Model	ANT-5GCombo7	
GNSS Antenna	Frequency	GPS L1/L2/L5 GLONASS G1/G2/G3 COMPASS B1/B2/B3 Galileo E1/L1/E2/E5a/E5b/E6
	Polarization	RHCP
	LNA Gain	40±2dB
	Noise Figure	≤2.0dB
	Supply Voltage	3~12V DC
	Current Consumption	≤60mA
	V.S.W.R	< 2.0
	Impedance	50Ω
5G NR Antenna MIMO*4	Frequency Range	617~960MHz/1710~2690MHz/2900~3800MHz
	V.S.W.R	< 3.0
	Polarization	Linear
	Gain	4dBi (Typ.)
	Impedance	50Ω
WIFI Antenna MIMO*2	Frequency Range	2400~2483.5MHz/4900~5925MHz
	V.S.W.R	< 2.5
	Polarization	Linear
	Gain	4dBi (Typ.)
	Impedance	50Ω
Mechanical	Cable	LMR100*7
	Connector	SMA or others
	Material	PC/ABS
	Mounting Method	Screw

**Disclaimer: Technical specifications may subject to change without prior notice*


Specification

Environmental	Operating Temperature	-40°C~+85°C
	Relative Humidity	Up to 95%
	Ingress Protection	IP67 (exclude cable outlet)
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant

**Disclaimer: Technical specifications may subject to change without prior notice*

Radiation Patterns


GPS Antenna

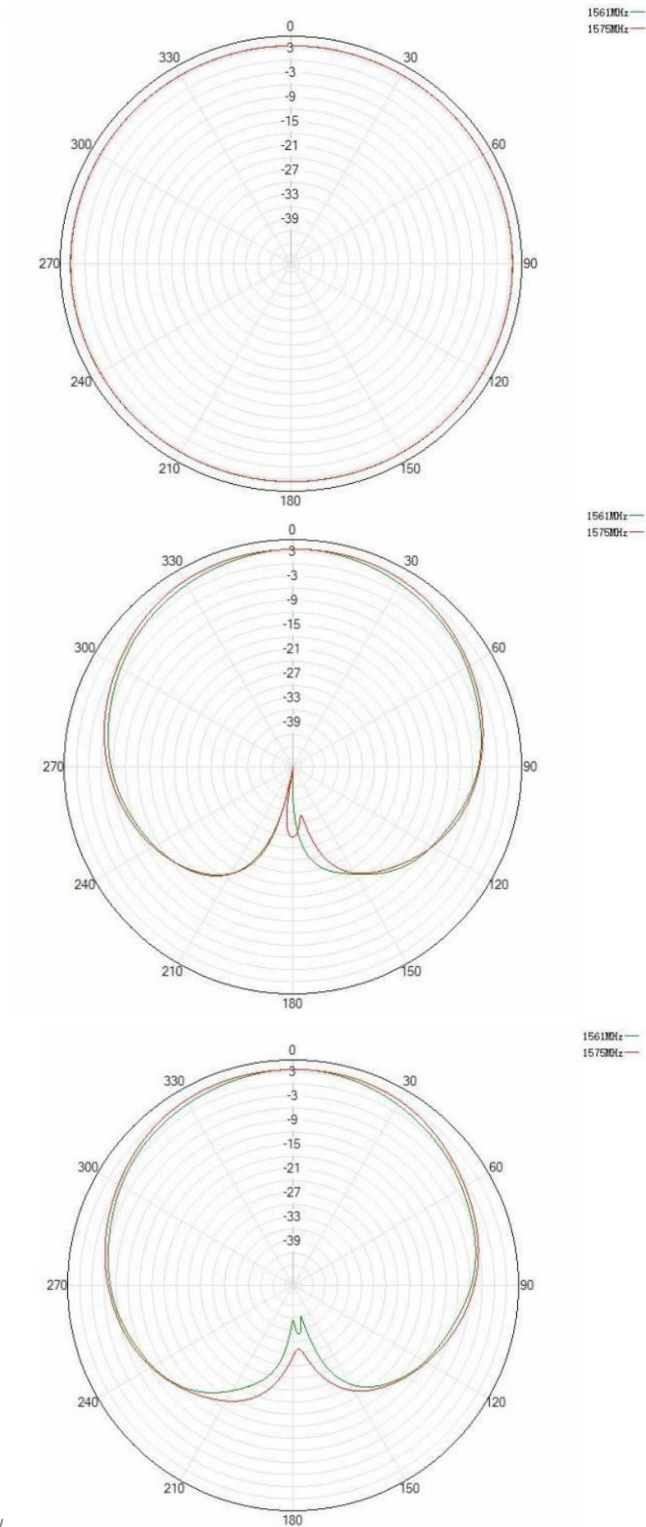


*Discl

otice


NR Antenna

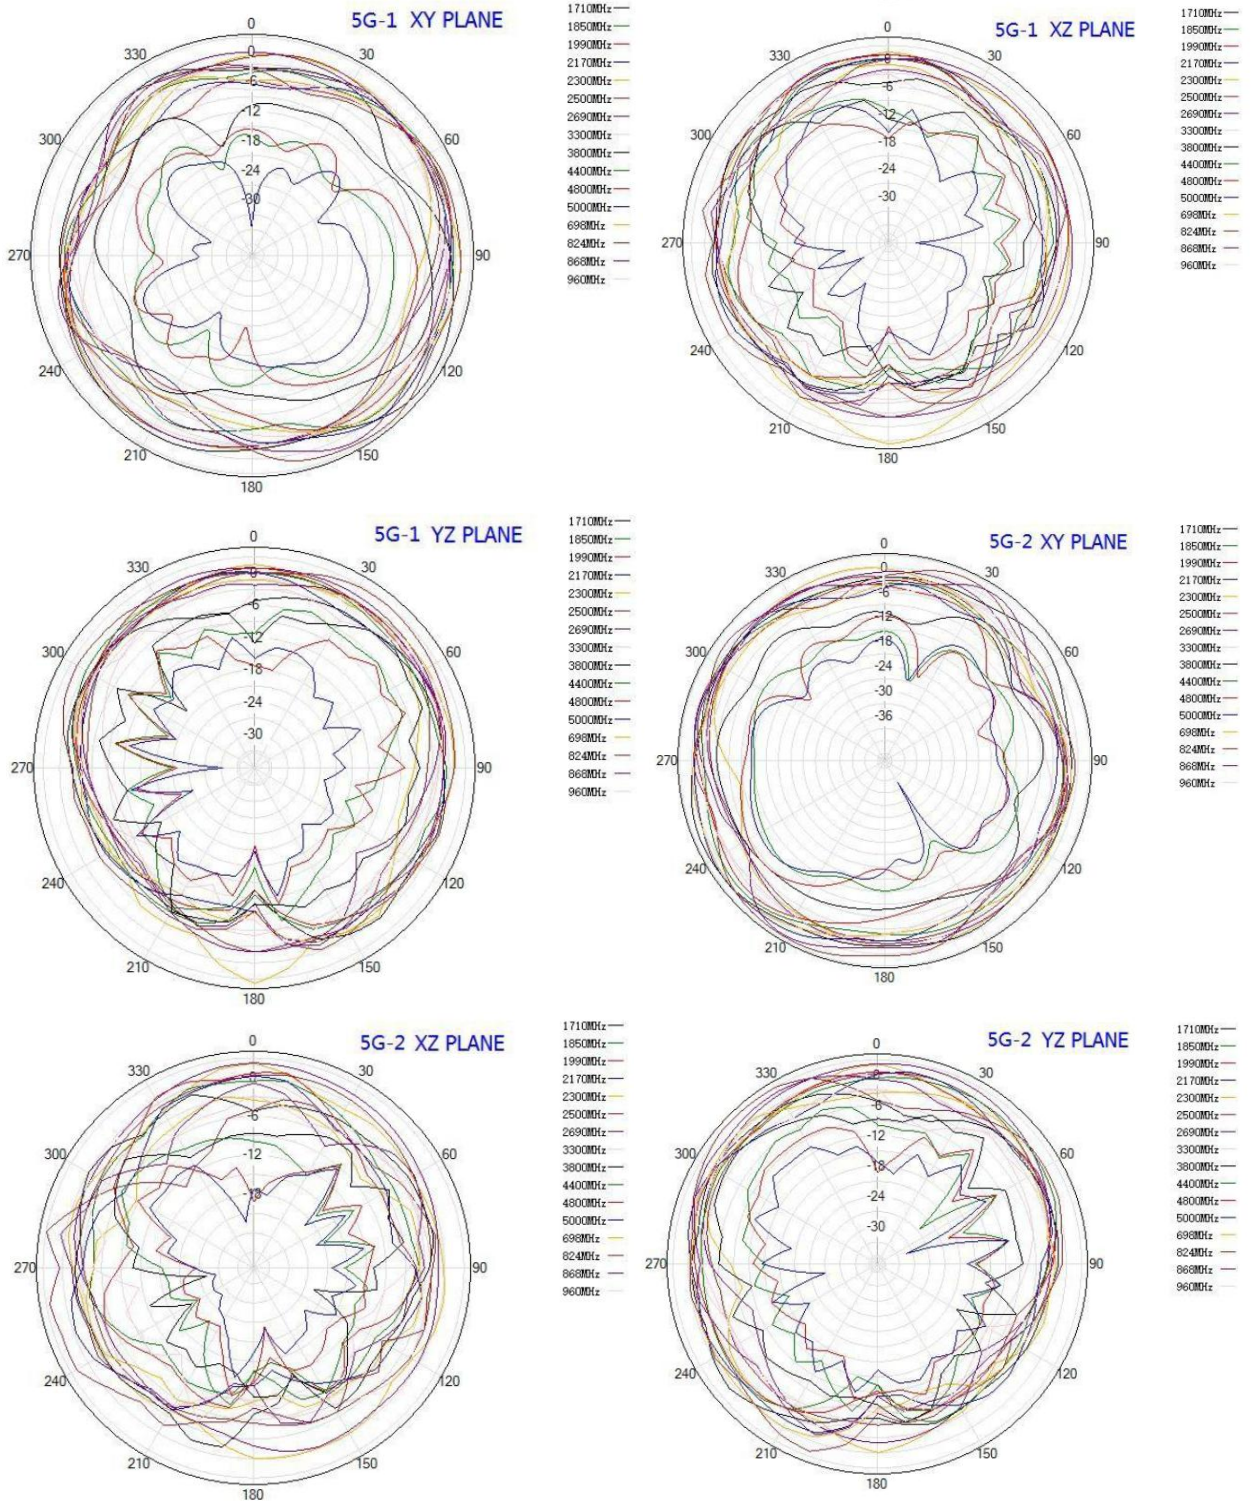


**Disclaimer: Technical specifications may subject to change without prior notice*

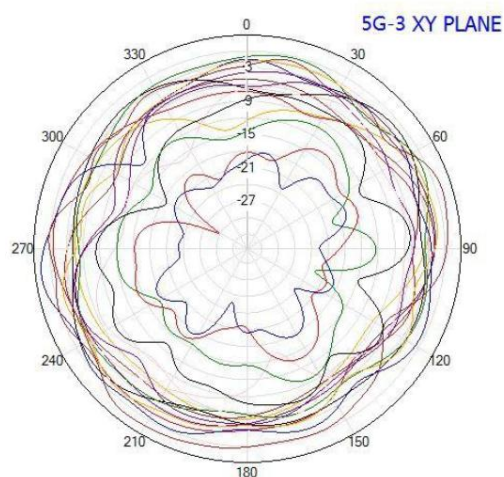


1710MHz
1850MHz
1990MHz
2170MHz
2300MHz
2500MHz
2690MHz
3300MHz
3800MHz
4400MHz
4800MHz
5000MHz
698MHz
824MHz
868MHz
960MHz

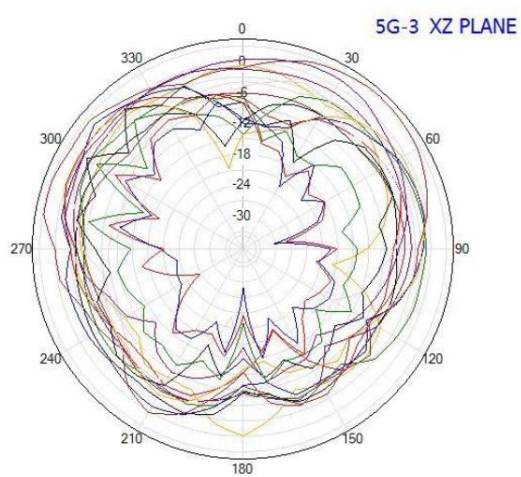


1710MHz
1850MHz
1990MHz
2170MHz
2300MHz
2500MHz
2690MHz
3300MHz
3800MHz
4400MHz
4800MHz
5000MHz
698MHz
824MHz
868MHz
960MHz

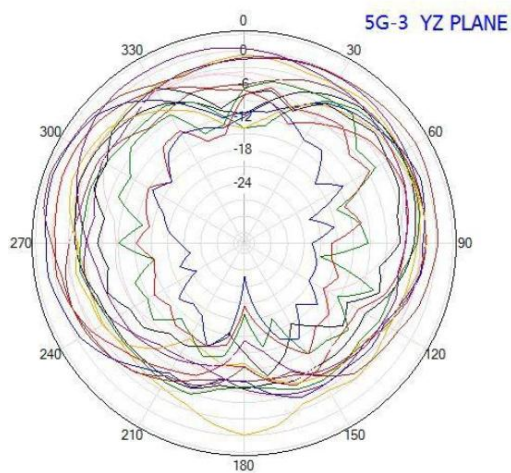


1710MHz
1850MHz
1990MHz
2170MHz
2300MHz
2500MHz
2690MHz
3300MHz
3800MHz
4400MHz
4800MHz
5000MHz
698MHz
824MHz
868MHz
960MHz

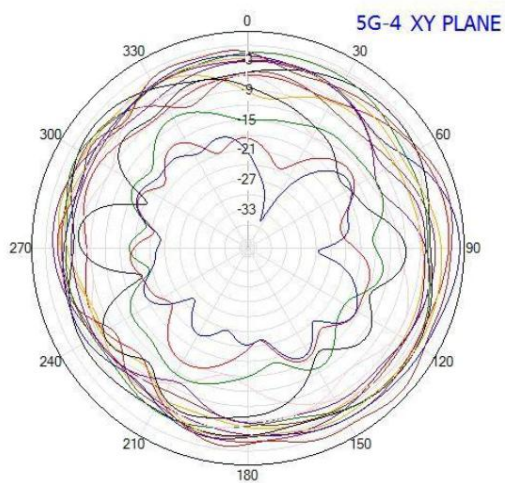

1710MHz
1850MHz
1990MHz
2170MHz
2300MHz
2500MHz
2690MHz
3300MHz
3800MHz
4400MHz
4800MHz
5000MHz
698MHz
824MHz
868MHz
960MHz

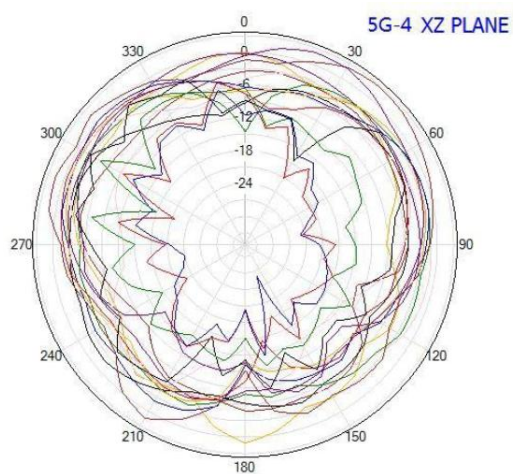


1710MHz
1850MHz
1990MHz
2170MHz
2300MHz
2500MHz
2690MHz
3300MHz
3800MHz
4400MHz
4800MHz
5000MHz
698MHz
824MHz
868MHz
960MHz

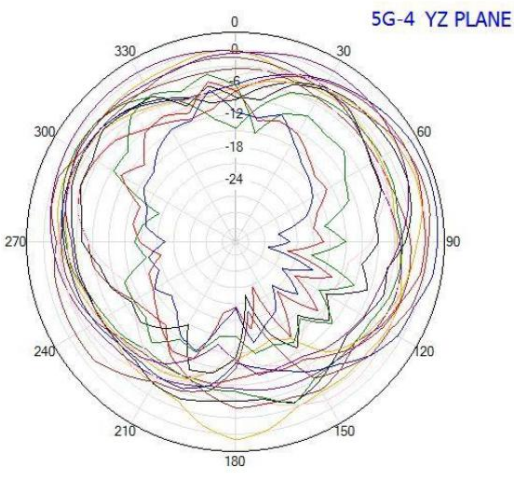


1710MHz
1850MHz
1990MHz
2170MHz
2300MHz
2500MHz
2690MHz
3300MHz
3800MHz
4400MHz
4800MHz
5000MHz
698MHz
824MHz
868MHz
960MHz

WIFI Antenna


WIFI-1 XY PLANE

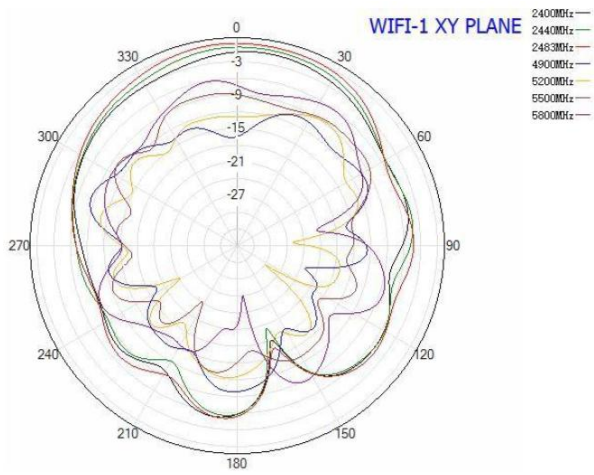


WIFI-1 XZ PLANE

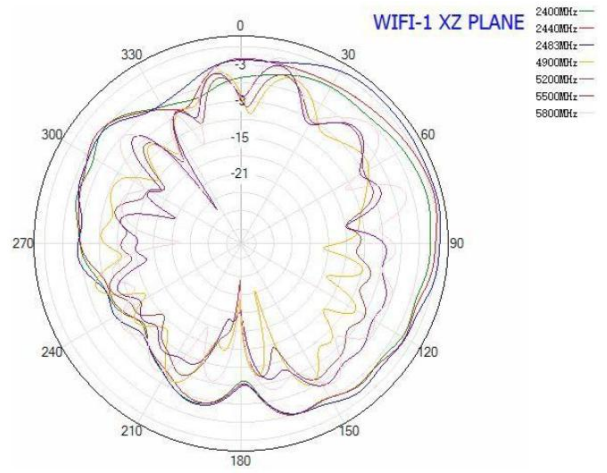


WIFI-1 YZ PLANE

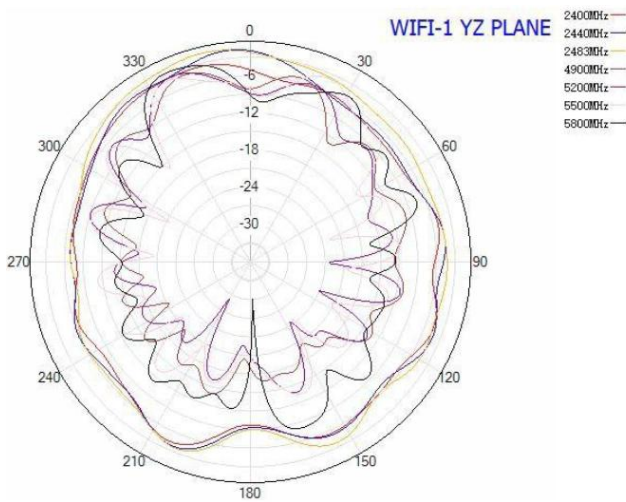


WIFI-2 XY PLANE

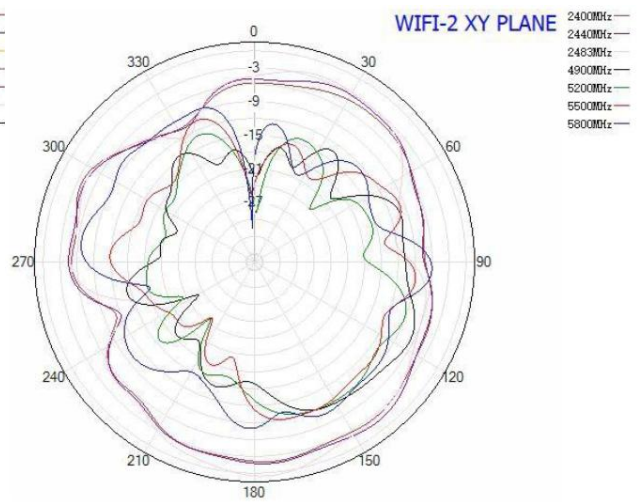


WIFI-2 XZ PLANE

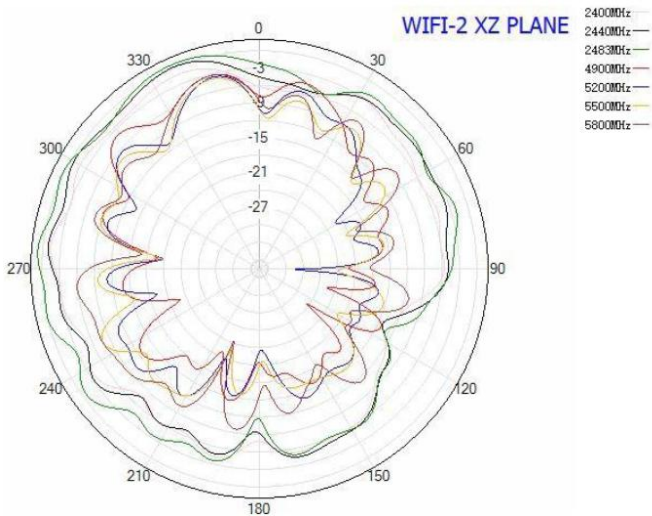

WIFI-2 YZ PLANE

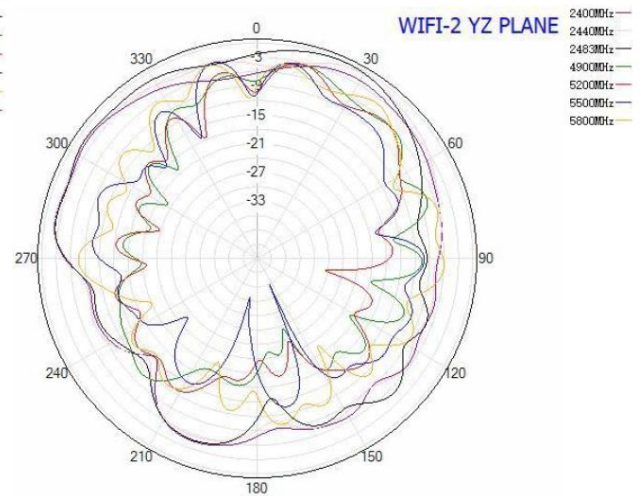


Dimension

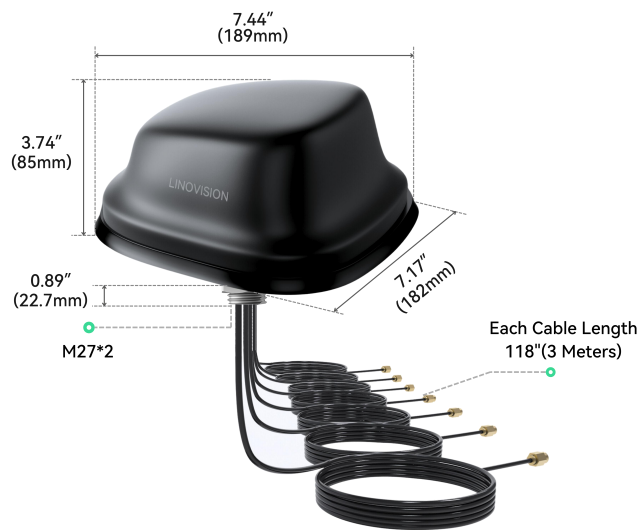


Weight:1000g (2.2 lb)

Interface

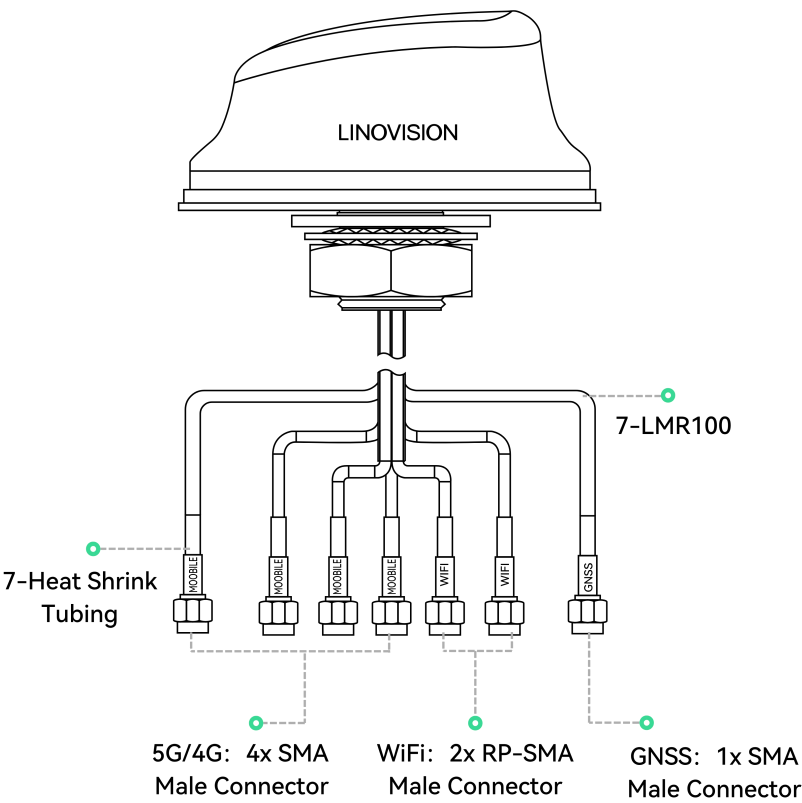

Installation

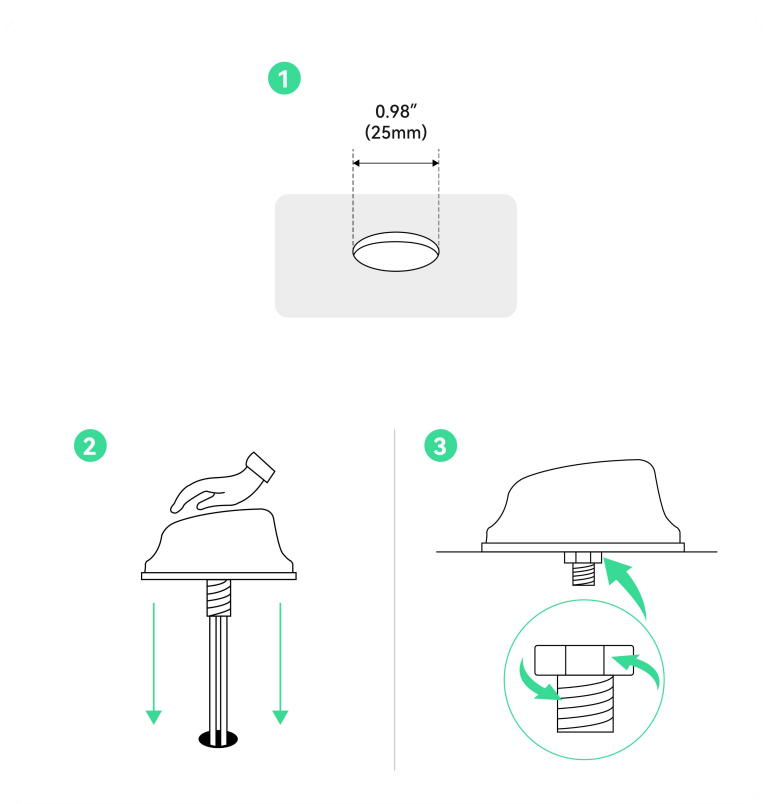

Package Contents



ANT-5GCombo7



User Manual