

LINOVISION

# IOT-R35W

Datasheet


IOT-R35W is a cost-effective industrial cellular router with embedded intelligent features that are designed for multifarious M2M/IoT applications. Global WCDMA and 4G LTE carrier supported make this drop-in connectivity a great help for operators in maximizing uptime.



Integrating embedded cellular modem and dual SIM function, the IOT-R35W provides 3G/4G cellular network with maximum 150 Mbps download and 50 Mbps uplink, it also has 5 fast Ethernet ports and supports Wi-Fi that compliance with 802.11b/g/n standard. All these capabilities deliver users an uninterrupted internet access.

Easy deployment and comprehensive remote device management makes IOT-R35W versatile in most of IoT/M2M applications.

## ◆ Application Example

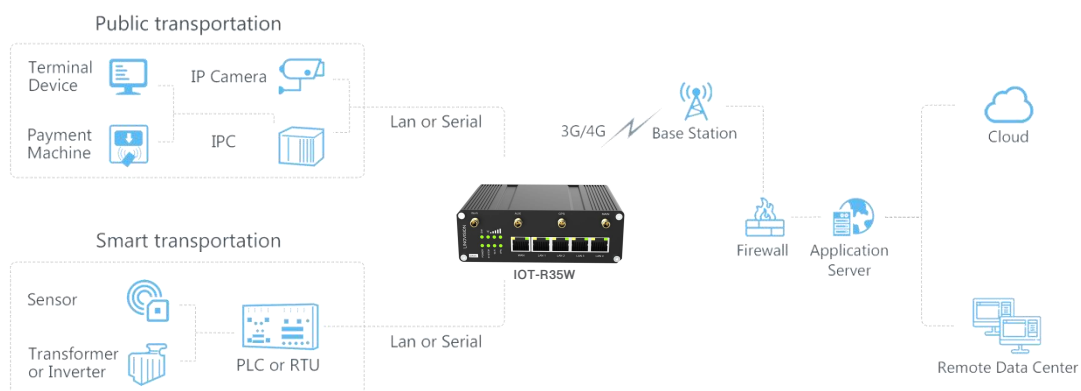

## ◆ Benefits

- NXP industrial grade processor
- Global 4G LTE CAT4/3G network with dual SIM cards for backup between multiple carrier networks
- Embedded Python SDK for secondary development
- Flexible modular design provides users with different connection modules like Ethernet, I/O, serial port, Wi-Fi, GPS for connecting diverse field assets
- Rugged enclosure, optimized for DIN rail or shelf mounting
- 3-year warranty included

## ◆ Security & Reliability

- Automated failover/failback between Ethernet, Cellular (dual SIM) and Wi-Fi
- Secure transmission with VPN tunnels like IPsec/OpenVPN/GRE/L2TP/PPTP/DMVPN/WireGuard/ZeroTier
- Embeds hardware watchdog to automatically recover from various failure, ensure highest level of availability
- Establishes a secured mechanism on centralized authentication and authorization of device access by supporting AAA (Radius, TACACS+, LDAP, local Authentication) and multiple levels of user authority

## ◆ Easy Maintenance

- DeviceHub and Linovision Development Platform provide easy setup, mass configuration, and centralized management of remote devices
- The user-friendly web interface design and more than one option of upgrade help administrator to manage the device as easy as pie
- WEB GUI and CLI enable the admin to achieve simple management and quick configuration among a large quantity of devices
- Efficiently manage the remote routers on the existing platform through the industrial standard SNMP and TR069

## ◆ Capabilities

- Link remote devices in an environment where communication technologies are constantly changing
- Support 802.11 b/g/n, as AP or client mode, to establish versatile wireless network or be the backup WAN link for 4G/3G
- Support rich protocols like SNMP, TR069, MQTT, Modbus bridging, RIP, OSPF
- Provide power to 802.3af/at standard PoE devices and support power management
- Support wide operating temperature ranging from -40°C to +70°C/-40°F to +158°F

## ◆ Hardware Specifications

### Hardware System

CPU	ARM Cortex-A7, 528 MHz
Memory	128 MB DDR3 RAM and 128MB Flash
Extendable Storage	1 × Micro SD Slot

### Cellular Interface

Network	4G LTE (CAT 4)/WCDMA/GSM (Differ as regions)
Antenna Connector	2 × 50 Ω SMA Connectors (Center PIN: SMA Female)
SIM	2 × SIM Slot (Mini SIM-2FF), 1.8V/3V

### Ethernet Interface

Numbers	5 × RJ45 10/100 Mbps
Property	1 × WAN + 4 × LAN
Mode	Full or half duplex (Auto-Sensing)
Ethernet Isolation	1.5 kV RMS
PoE (Optional)	4 × 802.3 af/at PoE PSE on LAN Ports

### Wi-Fi Interface (Optional)

Antenna Connector	1 × 50 Ω SMA Connector (Center PIN: RP-SMA Female)
Standards	IEEE 802.11 b/g/n, 2.4GHz
Tx Power	802.11b: 16 dBm +/-1.5 dBm (11 Mbps)
	802.11g: 14 dBm +/-1.5 dBm (54 Mbps)
	802.11n: 13 dBm +/-1.5 dBm (65 Mbps, HT20/40 MCS7)

### GNSS (Optional)

Antenna Connector	1 × 50 Ω SMA Connector (Center PIN: SMA Female)
Technology	GPS/GLONASS/BDS/Galileo/QZSS
Positioning Accuracy	2.5m CEP (Open Air)

### Serial Port

Numbers	1 × RS232 + 1 × RS485 (2 × RS485 Hardware Customizable)
Connector	3.5mm Terminal Block
Baud Rate	300bps to 230400bps

### DI/DO

Numbers	1 × DI + 1 × DO, Galvanic Isolation
Connector	3.5mm Terminal Block
Digital Input	Dry Contact
Digital Output	Wet Contact, maximum 0.3A@30VDC

Others	
Reset Button	1 × RESET
LED Indicators	1 × POWER, 1 × SYSTEM, 1 × SIM, 1 × Wi-Fi, 1 × VPN, 3 × Signal strength
Power Connector	1 × 2-pin 5.08 mm Terminal Block, with Surge-Protection and Reverse Polarity Protection
Built-in	Watchdog, Timer
Power Supply and Consumption	
Power Input	9-48 VDC(48V is need for PoE)
Power Output	4 × 802.3 af/at PoE PSE on LAN Ports
(Optional)	Per Port 30W Max., Total 60W Max.
Power Consumption	Typical 3.9 W, Max 4.6 W (In Non-PoE mode)
Physical Characteristics	
Ingress Protection	IP30
Housing & Color	Metal, Black
Weight	485 g
Dimension	135 x 103 x 45 mm (5.31 x 4.06 x 1.77 in)
Installation	Desktop, Wall Screw Mounting, DIN Rail Mounting
Environmental	
Operating Temperature	-40°C to +70°C (-40°F to +158°F) Reduced Cellular Performance Above 60°C
Storage Temperature	-40°C to +85°C (-40°F to +185°F)
Relative Humidity	0% to 95% (non-condensing) at 25°C/77°F
Approvals	
Regulatory	CE, FCC, RCM, JATE, Telec
Environmental	RoHS
EMC	EN 55032, EN 55035
EMS	IEC 61000-4-2 Level 3
	IEC 61000-4-3 Level 2
	IEC 61000-4-4 Level 3
	IEC 61000-4-5 Level 3
	IEC 61000-4-6 Level 3
	IEC 61000-4-8 Level 4
Radio Frequency	IEC 61000-4-11 Level 3
	EN 301 489-1/17/19/52, EN 301 511, EN 301 908-1/2/13, EN 303 413, EN300 328

## ◆ Software Specifications

### Network

Network Protocols	IPv4/IPv6, PPP, PPPoE, SNMP v1/v2c/v3, TCP, UDP, DHCP, RIPv1/v2, OSPF, DDNS, VRRP, HTTP, HTTPS, DNS, ARP, QoS, SNTP, Telnet, VLAN, SSH, MQTT, MQTTS, TR069, etc.
Routing	Static Routing, RIP, OSPF
DDNS	Supported >16 service providers, others can be configured manually
QoS	Upload/Download Bandwidth Limit
IP Passthrough	Support to assign WAN IP address to the device on LAN
Reliability	VRRP, WAN Failover, Dual SIM Backup
Diagnostics Tools	Ping, Traceroute, TCPDUMP, QXDM, Log Server, Cellular AT Command Debugger, Firewall iptables Debugger

### Wi-Fi Interface (Optional)

Modes	AP or Client mode
Security	WEP/WPA-PSK/WPA2-PSK/WPA-EAP/WPA2-EAP authentication, TKIP/AES encryption
Wi-Fi Users	Up to 15 simultaneous connections
MAC Filter	Blacklist, Whitelist

### GNSS (Optional)

Protocol	NMEA0183, PMTK
Mode	Support reading by Serial Port, MQTT, TCP Client/Server, UDP Server

### Security


Firewalls	Access Control, DMZ, Port Mapping, MAC Binding, SPI Firewalls, DoS&DDoS Protection, Filtering(IP&Domain)
VLAN	Port and tag-based VLAN separation
AAA	Radius, Tacacs+, LDAP, Local Authentication, 802.1x
Multilevel Authority	Multiple Levels of User Authority

### VPN


OpenVPN	Multiple Clients and a Server Support
IPsec	Multiple Clients and a Server Support
GRE	GRE Tunnel Support
L2TP	L2TP Client Support

PPTP	PPTP Client Support
DMVPN	DMVPN Spoke Support
WireGuard	Support
ZeroTier	Support
<b>Others</b>	
Serial Mode	Transparent(TCP Client/Server, UDP Server, MQTT Client), Modbus Server/Client, Modbus Gateway (Modbus RTU to Modbus TCP)
Digital Input	Support reading by SMS, Email, CLI, Modbus TCP/RTU Server, MQTT
Digital Output	Support triggering by DI, SMS, CLI, Modbus TCP/RTU Server, MQTT
App	Python SDK
<b>Management</b>	
Configuration	Web, CLI (SSH/Telnet), SMS, On-demand dial up, SNMP v1/v2c/v3, TR069, DeviceHub, Linovision Development Platform, HTTP(s) API
Update	Web, DeviceHub, Linovision Development Platform
Device Management	DeviceHub, Linovision Development Platform, MilesightVPN
SNMP	SNMP v1/v2/v3, Support SNMP Trap
TR069	Support
SMS	Send/Receive SMS, SMS Control, SMS Configuration
Event Alarm	System Restart/Reboot, Network Up/Down, Link Switch, etc.

## ◆ Hardware Overview

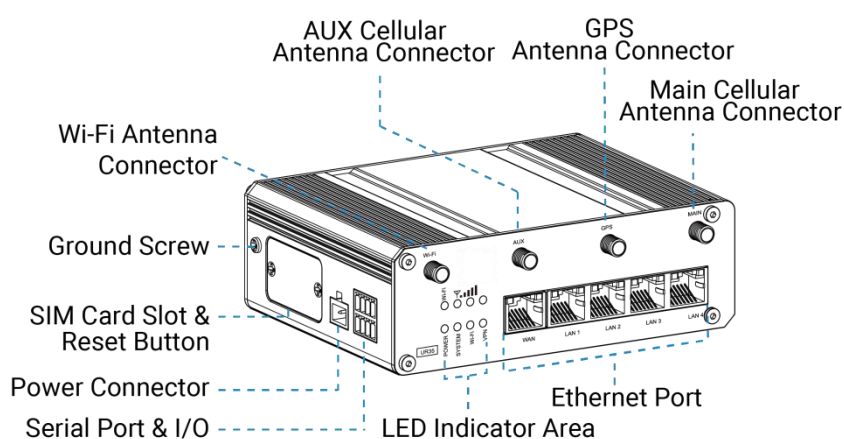


## ◆ Accessories



1 × Power Adapter



1 × 8-Pin Pluggable Terminal



1 × DIN Rail Clip Kit



2 × Magnetic Cellular Antennas



1 × Wi-Fi Antenna  
(Wi-Fi Version Only)



1 × GPS Antenna  
(GPS Version Only)



2 × Stubby Cellular  
Antennas  
(Optional)

**\*Note:** Contact us if you need any other special accessories or customized accessories.

◆ Dimensions(mm)

