


LINOVISION

IEEE802.3af/at to Passive 24V PoE Converter
POE-SP24V(Pro)
Quick Guide (V2.0/2026-5-14)



Quick Guide

Package Contents




POE-SP24V(Pro)




Quick Guide

Connection Diagram

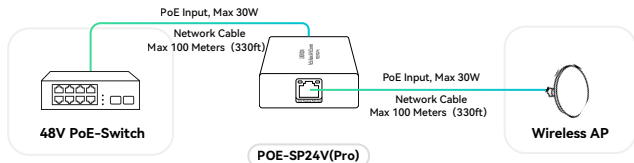


Interface

Front View



PoE IN IEEE802.3af/at

Back View



Passive PoE Out 24V/0.8A

Specifications

Mechanical Specs	
Dimensions (W*H*D)	60 × 25 × 100 mm (2.36 × 0.98 × 3.94 in)
Weight	0.12 kg (0.265 lb)
Material	Aluminum
Protection Rating	IP40
Interfaces	
PoE Input Port	Ethernet Port: 1 * 10/100/1000Base-T RJ45
PoE Standard	IEEE 802.3af/at
Passive PoE Output Port	Ethernet Port: 1 * 10/100/1000Base-T RJ45
Power Pin Assignment	4/5 (+), 7/8 (-)
Passive PoE Output	24V DC, 0.8A Max
Environment	
Operating Temperature	-30°C to 70°C (-22°F to 158°F)
Operating Humidity	10% to 90% non-condensing
Surge Protection	±2 kV