

POE-SWR712GM-10G

L3 managed industrial PoE switch



POE-SWR712GM-10G is a L3 managed PoE industrial switch developed independently. It has 8*10/100/1000Mbps RJ45 ports, 4*10Gbps SFP+ fiber module expansion slots and 1*Console port to flexibly expand your network. Among them, ports 1-8 have PoE power supply function, support IEEE802.3bt standard, support static routing function, provide perfect security policy, QoS policy and rich VLAN function, with ring network function, can form a ring network, and form a ring network topology between switches through hand in hand. Its redundancy, high reliability and other characteristics can make a link in the ring network disconnection, will not affect the network data forwarding.


Outstanding Features

- PoE supports IEEE802.3bt standards, with a maximum output of 90W per port.
- Data transmission and power supply distance up to 100 meters.
- Support IEEE802.3x full duplex flow control and Backpressure half duplex flow control.
- Panel indicator to monitor working status and help fault analysis.
- Aluminum alloy high energy roof heat conduction groove design.
- Supports one-key ring network and one-key storm suppression function, with redundant design and high reliability.
- High reliability design, support the traditional STP/MSTP/RSTP Layer 2 link protection technology.
- Supports static aggregation and dynamic aggregation (LACP), which increases link bandwidth, improves link reliability, implements load balancing, and link backup.
- Flexible and convenient management and maintenance Support Console, Telnet, SSH and other management modes.
- Supports WEB management, which is simple and efficient, and convenient for installation and commissioning by engineering and maintenance personnel.
- Supports HTTP, TFTP, and FTP file upload and download management.

Specification

Standard	IEEE802.3,IEEE802.3u,IEEE802.3ab,IEEE802.3z,IEEE802.3x,IEEE802.1X,IEEE802.1q , IEEE802.1p,IEEE802.1d,IEEE802.1w, IEEE802.3ad,IEEE802.3af,IEEE802.3at, IEEE802.3bt
Interface	8*10/100/1000Mbps RJ45 Ports 4*10Gbps SFP+ Slots 1*Console Port
Indicator	PWR(Green), LNK/ACT(Green), PoE(Orange), SYS(Green)
Network Media(Cable)	10BASE-T:UTP category 3,4,5 cable (≤100m) 100BASE-TX:UTP category 5, 5e cable (≤100m) 1000BASE-X:UTP category 5e, 5 cable (≤100m) 1000BASE-X:MMF, SMF 10GBASE-X:MMF, SMF
MAC Address Table	16K, Auto-learning, Auto-update
Jumbo Frame	12KByte
Packet Buffer	12Mbit
Transfer Mode	Store-and-forward
Exchange Capacity	96Gbps
Packet Forward Speed	71.42Mpps
Dimensions(L*W*H)	145*109*62mm (5.71*4.29*2.44in)
Input Voltage	48~57V DC
Input Power Supply	Port 1~8
PoE Output	30W(Max)
PoE Power On RJ45	1/2(+), 3/6(-), 4/5(-), 7/8(+)
PoE Power Budget	320W
Total Power Supply	350W
Operating Temperature	-40°C ~ 75 °C (-104°F ~ 167°F)
Storage Temperature	-40 °C ~ 80 °C (-104°F ~ 176°F)
Operating Humidity	5% ~ 95% non-condensing
Storage Humidity	0% ~ 95% non-condensing
Surge Protection	Differential mode ±2KV , Common mode ±4KV
Electrostatic Standard	Contact ±6KV, Air ±8KV
MTBF	>50000 hours

Dimensions (mm)

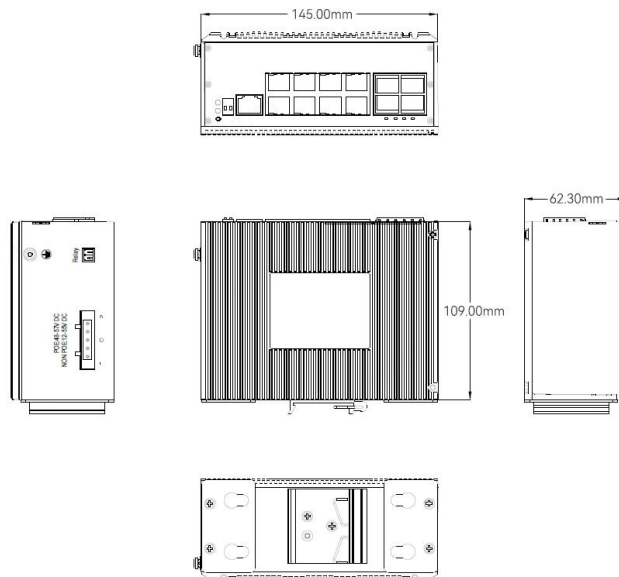

L3 Features	DHCP Server	DHCP Server DHCPv6 Server			
	Route	Static Route(IPV4/IPV6) Route Aggregation			
	RIP	RIP v1/v2			
	OSPF	OSPF v2			
	BGP	BGP4			
L2 Features	MAC Address Table	MAC Aging Time MAC Filter MAC Notification			
	Basic Management	Console/Telnet/SSH Http/Https,SSL/TLS FTP/TFTP Syslog SNMP(v1/v2c/v3),SNMP Trap SNTP/NTP CPU protect Software/Hardware watchdog Firmware Upgrade/Backup			
		Port Config	Ping/Traceroute Bandwidth Control Flow Control EEE MTU CFM(802.1ag) EFM OAM(802.3ah) DDM Storm Control Port Isolation Port Security Virtual Cable Test		
			Discovery	ULDP/Cisco UDLD LLDP(802.1ab) LLDP-MED	
				Link Aggregation	Static LACP(802.3ad) Load Balance(src-mac/dst-mac/src-ip/dst-ip) Max groups and ports per group
			VLAN		VLAN(802.1Q 4K) Access/Trunk/Hybrid Private VLAN VLAN Filter MAC-based VLAN Protocol-based VLAN IP Subnet-based VLAN Voice VLAN GVRP/GMRP QinQ/Selective-QinQ/Flexible QinQ VLAN Translation/N:1 VLAN Translation Guest VLAN
					Network Loop Detection
				Spanning Tree	

L2 Features	ARP	Static ARP	
		ARP Scanning Prevention	
		ARP Spoofing Prevention	
		ARP Guard	
		Gratuitous ARP	
		Dynamic ARP Inspection	
IPv4 Related Function	ICMP	Anti ICMP Attack	
		ICMP Rate Limit	
		ICMP Unreachable Drop	
	Control Multicast	DCSCM	
	Multicast VALN	Multicast VALN	
	IGMP	IGMP SNOOPING V1/V2/V3	
		Fast Leave	
		IGMP Proxy	
	DHCP	DHCP Client/BOOTP	
		DHCP Relay	
DHCP Snooping			
		DHCP Option 82/43/60/61/67	
IPv6 Related Function	IPv6 Basic	IPv6 ND Snooping	
	DHCPv6	DHCPv6 Relay	
		DHCPv6 Snooping	
		IPv6 SAVI	
		Security RA	
	IPv6 Unicast Routing	Static Route	
	IPv6 Multicast Routing	MLD v1/V2 Snooping	
	IPv6 Features	SNMP over IPv6 Support	
		HTTP over IPv6 Support	
		SSH over IPv6 Support	
		DNS over IPv6 Support	
		IPv6 ping/traceroute Support	
		IPv6 Telnet Support	
		IPv6 Radius+ Support	
		IPv6 Tacacs+ Support	
IPv6 SNTP/NTP Support			
IPv6 FTP/TFTP Support			
IPv6 IPsec Support			
		IPv6 ACL	
QoS(Quality Of Service)	Basic	Trust COS/DSCP	
		Trust Port	
	Scheduling	SP	
		WRR	
		WDRR	
	PolicyMap Stream	Based on VLAN	
		Based on COS/DSCP	
		Aggregate PolicyMap	
			Ingress PolicyMap
	Policing	CAR Stream Shaping(leak algorithm)	
		Ingress Policing	
	Rewrite	COS/802.1p Priority	
		IP Precedence	
		IPv4 DSCP/IPv6 DSCP	
		drop-precedence	
internal-priority			
Ingress/Egress Rewrite			

QoS(Quality Of Service)	Queuing	DSCP to DSCP mapping
		DSCP to DP mapping
		DSCP to Queue mapping
		COS to DP mapping COS to Queue mapping
ACL	IP-ACL	SIP/DIP
		IP Protocol
		IP Priority(DSCP,TOS, Precedence)
		TCP, UDP src, dst Port
	MAC-ACL	SRC/DST MAC
		VLAN
		COS
	IP-MAC ACL	Tag/Untag
User-defined ACL	MAC-ACL and IP-ACL	
ACL Features	Base on user defined profile	
	Based on time period ACL ACL on VLAN Based on ACL Stream	
Security	802.1x	Port Based Authentication
		Support EAPoR
		MAC based Authentication
		Guest VLAN
	MAB	Based on Port Authentication
		Based on MAC Authentication
	MAC Address Count Limit	Based on Port Based on VLAN
	IP Address Count Limit	Based on Port Based on VLAN
	Access Management	Based on source mac and IP address
	Deny DoS Attack	TCP Flag
		TCP Fragment
		IP Segment ICMP
TACACS+	Standard Support	
Radius	Standard Support	
SSL	Client, Support MD5 Openssl 1.1.0	
Redundancy Related Function	MRPP	Compatible ERRP
	ULPP	Uplink Protection Protocol Smart Link/Monitor Link
	ULSM	Uplink State Monitor
Flow Monitor Function	Mirror	Support one to one, multi to one
		Port based mirror, support ingress, egress, and both
		CPU based mirror
		Flow based mirror
PoE	PoE Management	RSPAN
		ON/OFF Config
		Alive Checking for PD 7/24 On/Off Scheduling