POE-USBC01

PoE to USB type C converter, Data and charging through One Cable



Outstanding Features

- Standard PoE to USB-C: Supports PD 48-57V voltage and automatically detects the power supply of PSE power module. Convert IEEE802.3af/at PoE Input to USB Type C adaptive output.
- Multi-Platform Support: Support Windows, Android, HarmonyOS, ISO and other operating systems, and is suitable for smartphones, tablets and other devices.
- Solid Design: Mini Size with Aluminum Alloy Enclosure. Support isolated circuit protection, 1500V high voltage isolation, effective equipment protection. Wide working temperature 32°F to +113°F (0°C to 45°C). Natural heat dissipation, intelligent temperature control.
- · Plug and Play: Simply plug in the Ethernet cables, no configuration is needed.

www.linovision.com

Interface



Application




Compatible System



HarmonyOS

Dimension

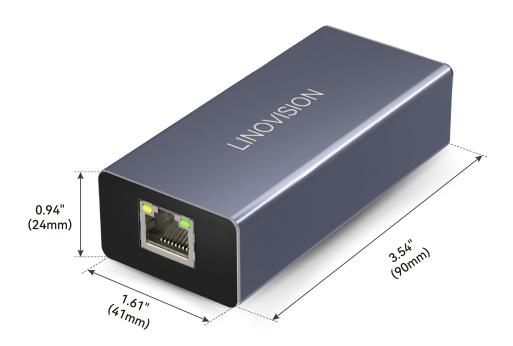

Specification

Hardware	
Dimensions (W*H*D)	$3.54 \times 1.61 \times 0.94$ " ($90 \times 41 \times 24$ mm)
Weight	0.181b (82g)
Material	Aluminum
USB Type C Output	5V=2A / 9V=2.2A
Interfaces	
Connector	1* 10/100Mbps PoE+ RJ45 Port 1* USB type C Port
РоЕ	
PoE Standard	IEEE 802.3af/at
PoE Input	48~57V Support both Mode A and Mode B
Environment	
Operating Temperature	-32° F to 113° F(0° C to 45° C)
Storage Temperature	-40° F to 158° F(-40° C to 70° C)
Operating Humidity	10% to 90% non-condensing
Storage Humidity	5% to 90% non-condensing
MTBF	>100,000 hrs
HV Isolation Protection	1. 5KV



Package Contents







Type C to C Cable



User Manual