


IoT Controller C300 Series




C300 series is an IoT controller used for remote control and data acquisition from diverse devices. It contains multiple I/O interfaces including analog input, digital input, relay output, serial port, PT100 RTD input, which support remote device data transmission via LoRaWAN® or 3/4G networks. Besides, C300 series supports multiple trigger conditions and actions which can work autonomously even when the network dropped. Combining with Linovision IoT Cloud solution, it can monitor and control remote devices via web server or mobile App easily.

Adopting industrial design and IP30 metal case, C300 is widely used in indoor applications like smart factory, building automation, etc.

◆ Application Example

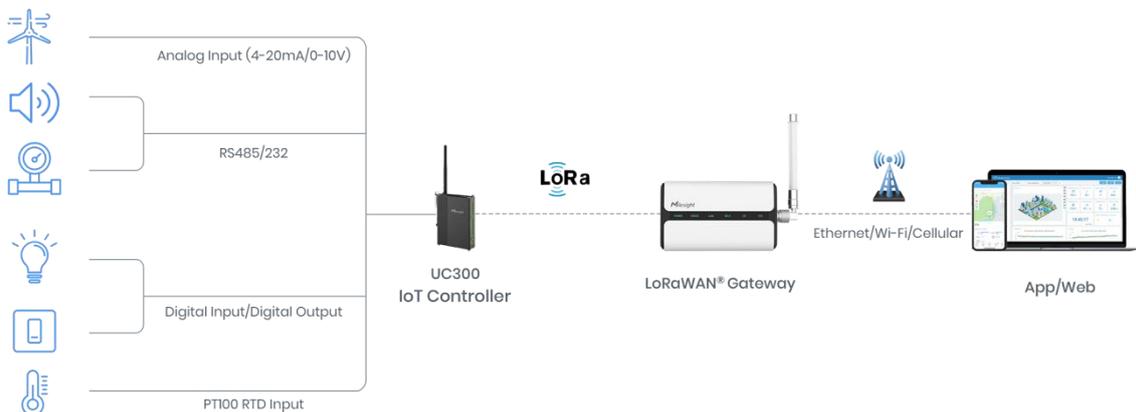

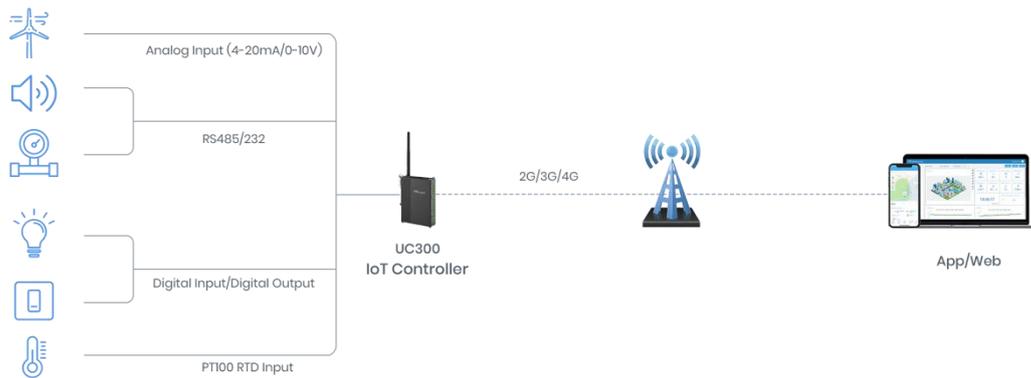

◆ Features

- Easy to connect with diverse wired devices through DIO/AI/RS232/RS485/PT100 RTD input interfaces
- Support reading 32 Modbus registers, can connect up to 32 Modbus devices
- Support LoRaWAN® or 3/4G wireless communication
- Multiple triggering conditions and actions
- Embedded watchdog for device working stability
- Industrial metal case design with wide operating temperature range
- Compliant with standard LoRaWAN® gateways and network servers
- Quick and easy management with Linovision IoT Cloud solution

◆ Specifications

Model	C300-LORA	C300-4G
Data Interfaces		
Interface Type	3.5mm Terminal Block	
Digital I/O		
Ports	4 × DI + 2 × DO	
Digital Input	Opto-isolated Digital Inputs, 3-24VDC Work Mode: Digital Input, Pulse Counter Input Frequency: ≤ 4000 Hz	
Digital Output	SPDT Relay Contact Rating: Max 3A@DC 30 V or AC 250 V	
Serial Port		
Ports	1 × RS232 + 1 × RS485	
Baud Rate	1200~115200 bps	
Protocol	RS232: Transparent	

	RS485: Transparent, Modbus RTU	
Analog Input		
Ports	2 × 4~20 mA + 2 × 0~10 V	
Resolution	12 bit	
Accuracy	4~20 mA: ±5% 0~10 V: ±1%	
Analog Input (RTD)		
Ports	2 × PT100 RTD Input	
Input Connections	2, 3-wire	
Resolution	12 bit	
Range	-200°C ~ 800°C	
Wireless Transmission		
LoRaWAN®		
Protocol	LoRaWAN®, Linovision D2D	---
Frequency	CN470/IN865/EU868/RU864/US 915/AU915/KR920/AS923-1&2& 3&4	
Antenna Connector	1 × 50 Ω SMA Connector (Center PIN: SMA Female)	
Tx Power	16 dBm (868 MHz)/20 dBm (915 MHz)/19 dBm (470 MHz)	
Sensitivity	-137 dBm @300bps	
Mode	OTAA/ABP Class C	
Cellular Transmission		
Network	---	4G LTE (CAT 1)/WCDMA/GSM (Differ as Regions)
Antenna Connector		1 × 50 Ω SMA Connector (Center PIN: SMA Female)
SIM Slot		1 (Micro SIM-3FF), 1.8V/3V
Application Mode		TCP/UDP/MQTT/AWS/Linovision IoT Cloud/SMS
Others		
Configuration Port	1 × USB Type-C for Power Supply, Configuration and Console	
Button	1 × Reset Button (Internal)	
LED Indicators	1 × System, 1 × ACT	

Power Connector	1 × 3.5mm 2-pin Terminal Block, with Surge-Protection and Reverse Polarity Protection	
Software		
Configuration	USB Type-C or Downlink	
Advanced Feature	Threshold Alarm, Data Storage, Data Retrievability, Data Retransmission, Linovision D2D Controller, LinovisionD2D Agent, IF-THEN Command	Threshold Alarm, IF-THEN Command
Physical Characteristics		
Power Supply	1. 5-24VDC by Terminal Block 2. 5V by Type-C USB	
Operating Temperature	-20°C ~ 60°C (-4°F to +140°F)	
Relative Humidity	0 ~ 95% (Non-condensing)	
Color & Material	Black, Metal	
Weight	142.3g	186g
Dimension	93 × 70 × 22 mm (3.66 × 2.76 × 0.87 in) (Antenna Connector Excluded)	
Installation	Desktop, Wall Mounting, DIN Rail Mounting	

◆ Dimensions (mm)

